


KIRIN

750w



Curva de eficiencia: 82% - 85% - 82%, eficiencia mínima 82%

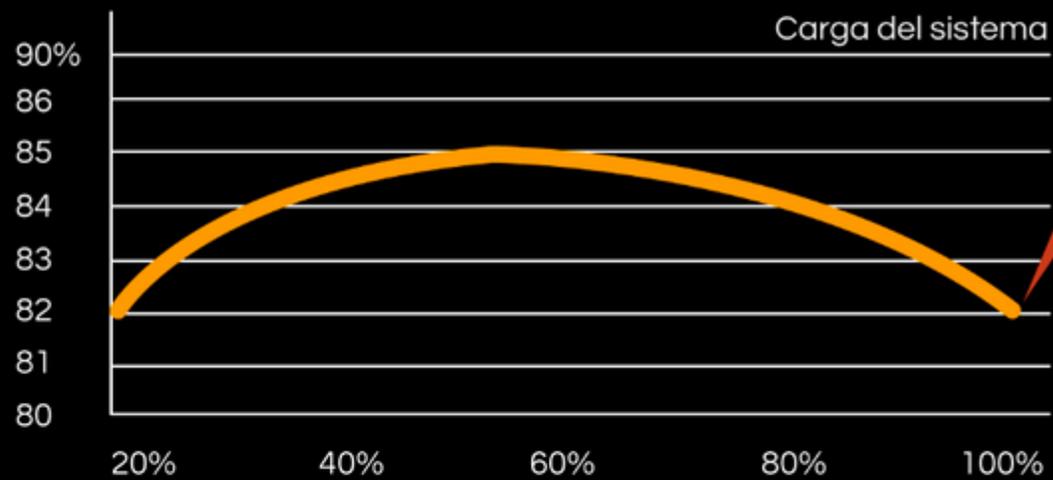


85%
EFICIENCIA



AC INPUT	100-240V / 10A / 47-63Hz				
DC OUTPUT	+3.3V	+5V	+12V	-12V	+5VSB
	20A	18A	58A	0.3A	2.5A
MAX POWER	120W		696W	3.6W	12.5W
	750W				



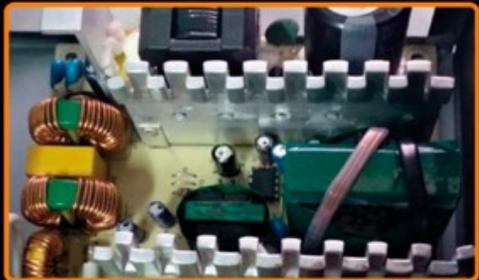








Capacity	750w
Model	Kirin 750w
Type	Intel Form factor ATX V2.31
Dimension	150 x 140 x 86 mm
Input Voltage	100-240Vac
Input Current	10 A
Input Frequency	47 - 63 Hz
PFC	>0.9
Hold Up Time	> 10ms
Efficiency	Up to %85
MTBF	>100,000 hrs
Protection	OVP / SCP / OPP / OTP
Regulatory	CE / RoSH / TUV / CB / CCC
Fan Type	120mm Sleeve Bearing





x1 Motherboard
20+4 PINS

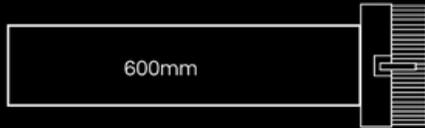

x1 CPU 4+4 PINS



x4 PCI-E 6+2 PINS



x8 SATA



x3 PERIPHERAL
4 PINS



x1 FLOPPY
4 PINS

